




**SUN FLAG
STEEL**

ISO-9001 & ISO/TS-16949 Co.

NABL Accredited

AD 2000 - Merkblatt W0 certified from TUEV Nord

Spring Steels

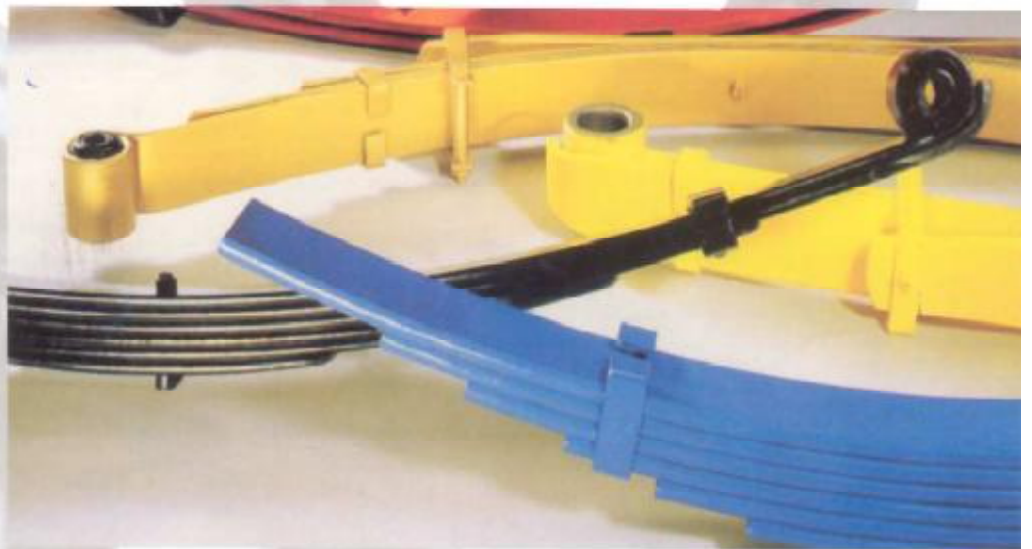

Regd. Office : 33, Mount Road, Sadar,
Nagpur-440001(India).
Tel No. (0712) 2524661, 2533014.
Fax : (0712)2520360.
Email : rkmalhotra@sunflagsteel.com
Website : www.sunflagsteel.com



Sunflag Spring Steels

General Features

Spring Steel is used for manufacturing various types of springs and components, for the suspension mechanism in Automobiles and Railways, like :

- Leaf Springs
- Coil Springs
- Stabiliser Bars
- Torsion Bars

A very high degree of quality, reliability and service life is expected in springs which are vital for any automobile or the railways. The spring's capacity to take on static and dynamic load over an extended period of time, depends on the steel that goes into its making.

Sizes and conditions of supply

Condition of supply	Shapes	Sizes
1. Hot Rolled	Flat	50 x 5 mm - 120 x 28 mm
	Round	12 mm - 100 mm dia
2. Drawn	Round	10 mm - 50 mm dia
3. Peeled and Ground	Round	10 mm - 50 mm dia

Edge Radius

Flats can be supplied with an edge radius "R" which is equal to either "T" or "T/2", where "T" is equal to thickness.

General Length

We cater to orders in standard and specific length.

- Standard length 4 to 6 mtrs with 10% shorts down to 1 mtr.
- In customer's specific lengths with tolerance +50/-0mm.

Straightness

Bars will have a straightness of 3 mm/mtr (max)

Quality

Surface Condition : On visual inspection, surface free from harmful defects, eg. crack, lap, fold, scratch, roll/pass marks, pits etc.

Decarburization

	Full	Partial	Total
Flats (upto 80 x 13)	Nil	0.15	0.15 mm (max)
Flats (above 80 x 13)	0.03	0.25	0.28 mm (max)
Other products	0.10	0.20	0.30 mm (max)

Grain size

5-8 (As per ASTM E-112)

As Rolled Hardness

310 BHN (max)

Inclusion Rating

As per IS-4163/ASTM E-45	: THIN : 2.5 A,B,C,D max
	: HEAVY : 1.5 A,B,C,D max
As per JIS G-0555	% dA - 0.15 max
	% dB + dC - 0.10 max
	% d Tot - 0.20 max



Delivery Conditions

- All bundles tied with wire/strapping at 3/4 places.
- Approx. bundle weight : 1.0 to 2.0 MT.
- Grade/HT. No. identification : By painted colour code and Heat Number written on each bundle.

Standard shapes and sizes of Spring Steel Flat Bars

1. RE Type



The conventional type is of Round Edge (RE) type, having edge radius approximately equivalent to thickness but not specified.

2. FL Type



Feather leaf type Spring Steel flats have edge radius of half of thickness and also have many advantages over RE type in terms of economical and technical aspects. Size - wise edge radius is to be mutually agreed.

Dimensional Tolerances

Flats :

Width Range (mm)	Tolerance (mm) (+/-)		Tolerance (mm)		
	Width (W)	Thickness (T)		Concavity (+ max) for	
		< = 10	> 10	T < = 10	T > 10
40-50	0.30	0.15	-	0.15	0.15
51-75	0.50	0.15	0.20	0.15	0.20
76-100	0.70	0.20	0.25	0.20	0.20
101-125	0.90	0.25	0.40	0.30	0.40

Rounds (Hot Rolled) :

Size (mm Dia)		Tolerance (mm)	
Over	Upto & Including	Tolerance (Dia)	Tolerance (Out of Round)
-	12	± 0.18	0.25
12	15	± 0.18	0.25
15	22	± 0.20	0.30
22	25	± 0.24	0.35
25	28	± 0.25	0.40
28	31	± 0.28	0.45
31	34	± 0.30	0.50
34	38	± 0.36	0.60
38	50	± 0.40	0.60
50	64	+ 0.8/-0	0.80
64	80	+ 1.20/-0	0.80
80	89	+ 1.20/-0	0.80
89	100	+ 1.60/-0	1.20

Rounds (Bright Bars) :

Size (mm Dia)		Tolerance on Dia (mm)		
Over	Upto & Including	Cold Drawn	Peeled / Turned	Centreless Ground
-	10	+ 0/- 0.09	---	+ 0/- 0.036
10	18	+ 0/- 0.11	+ 0/- 0.11	+ 0/- 0.043
18	30	+ 0/- 0.13	+ 0/- 0.13	+ 0/- 0.052
30	50	+ 0/- 0.16	+ 0/- 0.16	+ 0/- 0.062

Fatigue Guaranteed Spring Steels

Sunflag Steel a pioneer in making Spring Steel, has come up with products in this category, which ensure the required fatigue life to springs used in vehicles, in the most demanding situations.

The salient features of these products are :

- Use of virgin inputs in steel making such as DRI, Pig Iron which are free from undesirable tramp elements.
- Carefully planned, steel melting, refining vacuum degassing and casting processes.
- Well controlled reheating and rolling process.
- Closely monitored cooling parameters of rolled products.
- Thorough inspection and testing.
- Proper packing, stacking and storage for despatch.
- Wide size range.



Chemical composition of typical Spring Steel to various International Standards

	C	Si	Mn	P Max	S Max	Cr	V	B min
SAE								
50B50	0.48 ~ 0.53	0.15 ~ 0.30	0.75 ~ 1.00	0.035	0.040	0.40 ~ 0.60	---	0.0005
5060	0.56 ~ 0.64	0.15 ~ 0.30	0.75 ~ 1.00	0.035	0.040	0.40 ~ 0.60	---	---
50B60	0.56 ~ 0.64	0.15 ~ 0.30	0.75 ~ 1.00	0.035	0.040	0.40 ~ 0.60	---	0.0005
5150	0.48 ~ 0.53	0.15 ~ 0.30	0.70 ~ 0.90	0.035	0.040	0.70 ~ 0.90	---	---
5155	0.51 ~ 0.59	0.15 ~ 0.30	0.70 ~ 0.90	0.035	0.040	0.70 ~ 0.90	---	---
5160	0.56 ~ 0.64	0.15 ~ 0.30	0.75 ~ 1.00	0.035	0.040	0.70 ~ 0.90	---	---
51B60	0.56 ~ 0.64	0.15 ~ 0.30	0.75 ~ 1.00	0.035	0.040	0.70 ~ 0.90	---	0.0005
6150	0.48 ~ 0.53	0.15 ~ 0.30	0.70 ~ 0.90	0.035	0.040	0.80 ~ 1.10	0.15 min	---
9254	0.51 ~ 0.59	1.20 ~ 1.60	0.60 ~ 0.80	0.035	0.040	0.60 ~ 0.80	---	---
9260	0.56 ~ 0.64	1.80 ~ 2.20	0.75 ~ 1.00	0.035	0.040	---	---	---
JIS G 4801								
SUP 3	0.75 ~ 0.90	0.15 ~ 0.35	0.30 ~ 0.60	0.035	0.035	---	---	---
SUP 4	0.90 ~ 1.10	0.15 ~ 0.35	0.30 ~ 0.60	0.035	0.035	---	---	---
SUP 6	0.55 ~ 0.65	1.50 ~ 1.80	0.70 ~ 1.00	0.035	0.035	---	---	---
SUP 7	0.55 ~ 0.65	1.80 ~ 2.20	0.70 ~ 1.00	0.035	0.035	---	---	---
SUP 9	0.50 ~ 0.60	0.15 ~ 0.35	0.65 ~ 0.95	0.035	0.035	0.65 ~ 0.95	---	---
SUP 9A	0.55 ~ 0.65	0.15 ~ 0.35	0.70 ~ 1.00	0.035	0.035	0.70 ~ 1.00	---	---
SUP 10	0.45 ~ 0.55	0.15 ~ 0.35	0.65 ~ 0.95	0.035	0.035	0.80 ~ 1.10	0.15 ~ 0.20	---
SUP 11A	0.55 ~ 0.65	0.15 ~ 0.35	0.70 ~ 1.00	0.035	0.035	0.70 ~ 1.10	---	0.0005
BS 970 EN								
42	0.70 ~ 0.85	0.10 ~ 0.40	0.55 ~ 0.75	0.050	0.050	---	---	---
43	0.45 ~ 0.60	0.10 ~ 0.40	0.60 ~ 0.80	0.050	0.050	---	---	---
45	0.50 ~ 0.60	1.50 ~ 2.00	0.70 ~ 1.00	0.050	0.050	---	---	---
45A	0.55 ~ 0.65	1.70 ~ 2.00	0.70 ~ 1.00	0.050	0.050	---	---	---
47	0.45 ~ 0.55	0.50 max	0.50 ~ 0.80	0.050	0.050	0.80 ~ 1.20	0.15 min	---
48	0.45 ~ 0.55	0.10 ~ 0.50	0.50 ~ 0.80	0.050	0.050	1.00 ~ 1.40	---	---
48A	0.50 ~ 0.60	1.35 ~ 1.65	0.60 ~ 0.90	0.050	0.050	0.55 ~ 0.85	---	---
	C	Si	Mn	P Max	S Max	Cr	V	Mo
DIN								
38Si7	0.35 ~ 0.42	1.50 ~ 1.80	0.50 ~ 0.80	0.045	0.045	---	---	---
51Si7	0.47 ~ 0.55	1.50 ~ 1.80	0.50 ~ 0.80	0.045	0.045	---	---	---
60Si7	0.55 ~ 0.65	1.50 ~ 2.00	0.80 ~ 1.00	0.035	0.035	---	---	---
60SiCr7	0.55 ~ 0.65	1.50 ~ 1.80	0.70 ~ 1.00	0.045	0.045	0.20 ~ 0.40	---	---
55Cr3	0.52 ~ 0.59	0.15 ~ 0.40	0.70 ~ 1.00	0.035	0.035	0.60 ~ 0.90	---	---
50CrV4	0.47 ~ 0.55	0.15 ~ 0.40	0.70 ~ 1.00	0.035	0.035	0.90 ~ 1.20	0.10 ~ 0.20	---
51 CrMoV4	0.48 ~ 0.56	0.15 ~ 0.40	0.70 ~ 1.00	0.035	0.035	0.90 ~ 1.20	0.07 ~ 0.12	0.15 ~ 0.25
55 CrNiV22	0.51 ~ 0.55	0.15 ~ 0.30	0.80 ~ 1.00	0.025	0.020	0.30/0.50	0.20 - 0.30	Ni 0.80 - 1.20